

"Navira Mini 2.0" pathway luminaire, is an innovative design options to provide visual integration with the environment. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Product offered asymmetrical light distribution.

### Product Description

- Luminaire made of aluminium with non corrosive stainless steel fasteners.
- Clear toughened glass.
- Luminaire integrated with 30W / 50W-Single Arm & 60W & 100W-Double Arm.
- Suitable for mounting on 72mm / 91mm square pipe.
- Extruded aluminium mounting pipe for easy installation onto the pole.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) :  $\geq 70$
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-22801-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



### Product Benefits


- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Low maintenance cost.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

### Area of Application

Illuminating parks, Gardens, Private driveways, Commercial complex, Pathways in Residential buildings & office complex.

### Available Finish

Pure polyester powder coated  
RAL 9004 Black  
RAL 9007 Grey aluminium  
RAL 7016 Anthracite grey  
Graphite grey

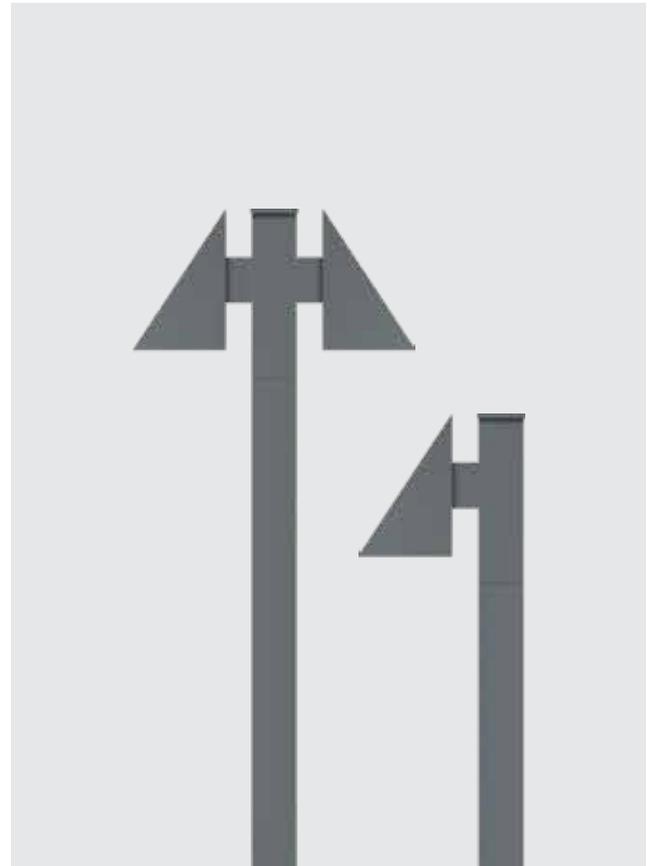



**Technical Specifications**

**General**

ID : 22801  
 System Wattage : 30W / 50W - Single Arm  
 : 60W / 100W - Double Arm  
 Driver Integral : Constant Current  
 Operating Voltage : 100-265Vac  
 Operating Temperature : -15°C~+50°C

**Light Source**

Light Source : NICHIA  
 CRI (Ra) : ≥70  
 LED Colour Temperature : 2700K / 3000K / 4000K / 5700K

**Physical**

Body : Aluminium & Extruded Aluminium  
 Diffuser : Clear Toughened Glass  
 Mounting : Suitable for mounting on □72 / □91  
 Finish : Powder coated  
 RAL 9004 Black  
 RAL 9007 Grey aluminium  
 RAL 7016 Anthracite grey  
 Graphite grey

**Driver**

Power Supply : Integral  
 Input Voltage : 230-240Vac  
 Frequency : 50-60Hz  
 Power Factor : >0.95  
 THD : <10%  
 Surge Protection : 4KV/6KV  
 Efficiency : >85%

**Optical Performance**

Light Distribution : Type II

